

# Autostat

---

## Product data sheet

Heat stabilised polyester film has low residual shrinkage at elevated temperatures. This is essential when tight registration tolerances need to be maintained during multiple printing operations.

### PRODUCT DESCRIPTION

Autostat is a high quality stabilised polyester film, with state of the art lay flat and roll formation properties, and is available in sheets and rolls.

### Product Range:

Product	Gauge	Description
Autostat CT	75 µm 100 µm 125 µm 175 µm	Clear, adhesion treated on both sides
Autostat CP <sup>1</sup>	125 µm 175 µm	Clear, adhesion treated on one side, planarised
Autostat CUS	125 µm	Clear, untreated
Autostat AHU	75 µm 100 µm 125 µm 250 µm	Hazy, untreated
Autostat HT <sup>2</sup>	125 µm	Hazy, adhesion treated on both sides
Autostat WT <sup>2</sup>	75 µm 125 µm 250 µm 350 µm	Opaque, white satin finish, adhesion treated on both sides

<sup>1</sup> Specialist products CP7L, CP10L and CPT10L are also available – please see separate data sheets

<sup>2</sup> Please see separate data sheet

### PRODUCT APPLICATIONS

Autostat is used for the manufacture of a variety of applications including:

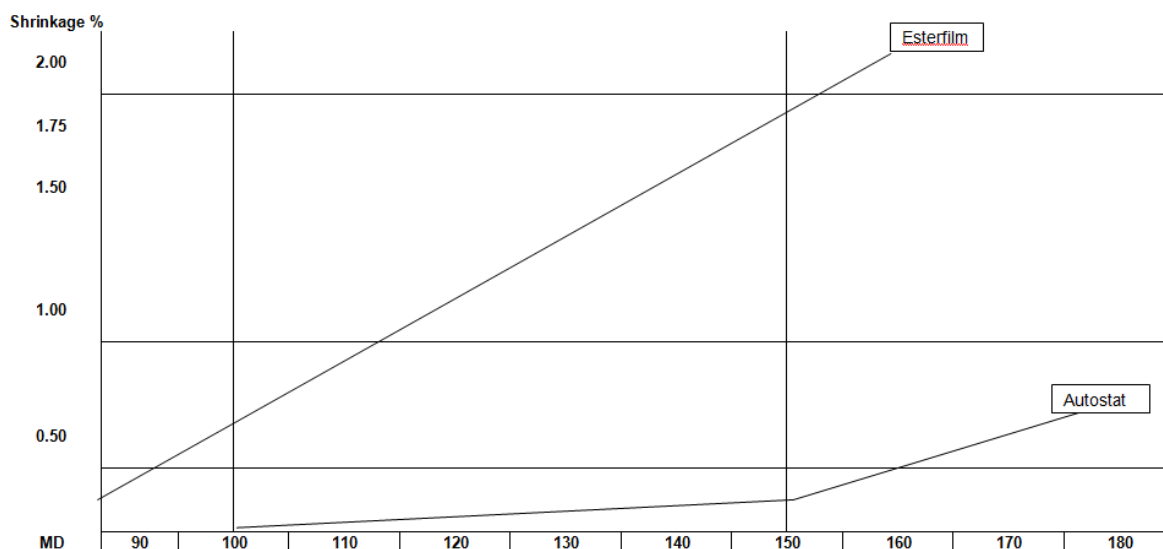
- Flexible circuitry
- Medical diagnostics
- Printed electronics
- FIM graphics
- Sensors



**PRODUCT PERFORMANCE**

Gauge	Specification	Test Method
Thickness	Dimensional stability	MacDermid Autotype Method <sup>1</sup> Based on ASTM D1204
≥ 100μ	MD ≤ 0.2% max @ 150 °C/30 minutes TD ±0.08%max @ 150 °C/30minutes	
≤ 75μ	MD ≤0.5%max @ 150 °C/30minutes TD ±0.1%max @ 150 °C/30 minutes	
	+ indicates expansion - indicates shrinkage	

<sup>1</sup> See Test Method Manual

**MD (machine direction) shrinkage versus temperature for 125μ films****TD (transverse direction) shrinkage at 150°C for 30 minutes**

TD shrinkage is much lower than MD shrinkage and may even be completely absent. When the film does not shrink at all a small positive expansion may take place. A typical result for Autostat would be MD - 0.1% and TD + 0.02%.

**INK ADHESION**

The adhesion treatment used on the CT, WT and HT grades enhances adhesion of UV curable dielectric inks, but may not be fully compatible with certain conductive silver inks.

A selection of inks that have been tested in our laboratories are shown in the table below. This list is not comprehensive, but is representative of inks available from named suppliers.



	Treated Autostat	Untreated Autostat
<b>HENKEL (ACHESON)</b>		
Conductive Inks		
725A	✓✓	✓✓
PF410 (477SS)	✓	✓✓
418SS	✓✓	✓✓
423SS	✓	x
440A	✓	✓
965SS	x	x
PF407A	✓	✓
Dielectric Inks		
451SS	✓✓	x
452SS	✓✓	✓✓
1020SS	✓✓	x
<b>DUPONT</b>		
Conductive Inks		
5000	✓✓	✓✓
5007E	✓✓	✓✓
5025	✓✓	✓✓
5075	✓✓	✓
7102	✓	x
Dielectric Inks		
5018	✓✓	✓
<b>SUN CHEMICAL</b>		
Conductive Inks		
26-8204	✓✓	x
26-8203	✓	x
Dielectric Inks		
40-317	✓✓	x
✓✓	Recommended	
✓	Test fully before use, can be subject to variation	
x	Not recommended	

These results are intended as a guide only. Full in-house testing is essential to ensure success under user conditions.



**TYPICAL PROPERTIES**

Note – these relate to CT, AHU and CUS grades. For other grades please refer to their separate data sheets.

Property	Autostat	Test Method
<b>Chemical Properties</b>		
Chemical Resistance <sup>1</sup>	Chemical resistance of polyester is generally good but has not been extensively tested for circuitry applications	DIN 42 115
Coefficient of hygroscopic expansion <sup>1</sup>	MD $8 \times 10^{-6}$ (per 1% RH) TD $7 \times 10^{-6}$ (per 1% RH)	Base film manufacturer's test method (40-80% RH)
Moisture vapour transmission rate (MVTR) <sup>1</sup>	3.57g/m <sup>2</sup> /24 hours	Base film manufacturer's test method
Oxygen transmission rate <sup>1</sup>	8.2ml/m <sup>2</sup> /24 hours	Base film manufacturer's test method
Density <sup>1</sup>	1.4g/cm <sup>3</sup>	ASTM D1505-79 modified to base film manufacturer's method at 23 °C
<b>Electrical Properties</b>		
Dielectric strength <sup>2</sup>	CT 18 – 20 kV CUS 5.8 – 9.4 kV AHU 10 – 19 kV	Base manufacturer's method based on ASTM D149
<b>Physical Properties</b>		
Thicknesses <sup>2</sup>	Nominal $\pm 5\%$	
Switch life <sup>3</sup>	>5 million flexes	MacDermid Autotype Method
Elongation at break <sup>2</sup>	CT 60 – 80 % CUS 145 % AHU 140 – 210 %	ASTM D882 (23 °C @ 50% RH) Strain rate - 50%/minute
Tensile strength at break <sup>2</sup>	CT 175 – 190 N/mm <sup>2</sup> CUS 200 N/mm <sup>2</sup> AHU 190 - 220 N/mm <sup>2</sup>	ASTM D882
Recommended max processing temperature	150 °C	

<sup>1</sup> This data is typical of polyester films and is not specific to any grade of Autostat. It is derived from base film manufacturer's literature

<sup>2</sup> Data derived from base manufacturer's literature

<sup>3</sup> See Test Method manual



Property	Autostat	Test Method
<b>Optical Properties</b>		
Gardner Haze <sup>1</sup>		
CT	<2%	ASTM D1003 <sup>2</sup>
CUS5	<2%	
AHU3	36%	
AHU4	39%	
AHU5	43%	
AHU10	90%	
Yellowness Index <sup>1</sup>		
CT	<2	ASTM E313 <sup>2</sup>
CUS	<2.5	
AHU3 – 5	<6	
AHU10	<17	

<sup>1</sup> Typical values only

<sup>2</sup> Adapted to MacDermid Autotype Method, see Test Method Manual

## IMDS ID-No 164514418

### LEGISLATIVE DIRECTIVES

This product does not knowingly contain any phthalates, or substances listed in the European End-of-Life Vehicles (ELV), Restriction of the use of certain Hazardous Substances in electrical and electronic equipment (RoHS) or Waste Electrical and Electronic Equipment (WEEE) Directives.

EC Regulation 594/91 classifies ozone depleting substances into a number of different groups, I-VI. Autostat does NOT contain any substance classified in groups I-VI nor have any of the substances been used by MacDermid Autotype during manufacture. For details of the content of each of the groups, please see separate ozone depleting substances document

### Revision 140417150228ES #5

The information and recommendations in this publication are believed to be accurate and are offered in good faith but do not constitute specifications. Suggestions concerning uses and applications are only the opinion of MacDermid Autotype Limited and users should carry out their own testing procedures to confirm suitability for their purposes. Except in the case of death or personal injury caused by the materials, MacDermid Autotype Limited MAKES NO WARRANTY OF ANY KIND AND EXCLUDES ANY STATUTORY WARRANTY EXPRESS OR IMPLIED other than that materials conform to their current applicable standard specification. Statements herein therefore should not be construed as guarantees of satisfactory quality or fitness for purpose. The responsibility of MacDermid Autotype Limited for claims arising out of breach of guarantee, negligence, strict liability or otherwise is limited to the purchase price of the material. Suggestions concerning working practices and procedures are based on the practices adopted by existing users of the products and are made in good faith. IT IS THE RESPONSIBILITY OF THE USER TO ENSURE THAT ALL RELEVANT HEALTH AND SAFETY LAWS AND REGULATIONS ARE COMPLIED WITH. MacDermid Autotype Limited does not provide any advice on such laws and regulations and accepts no responsibility, express or implied, for breach of such regulations. Statements concerning the use of products described herein should not be construed as recommending the infringement of any patent and no liability for infringement arising out of such use is assumed.

© 2016 MacDermid Autotype Ltd

