

# AUTOTEX DP

## Product Data Sheet


Textured Hardcoat Polyester Film



### DESCRIPTION

**Autotex DP** is a high quality hardcoated polyester\* film with a flexible, chemically bonded, UV-cured textured coating.

**Autotex DP** has been developed to be compatible with the Hewlett Packard Indigo digital printing system.

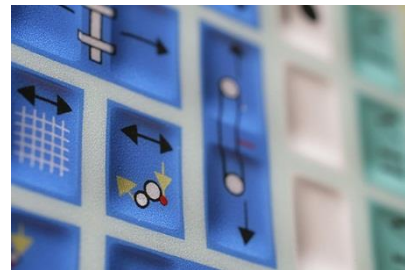

### PRODUCT RANGE

Products	Finish	Gauge		
		150 µm	200 µm	280 µm
<b>Autotex DP</b> with primer for HP Indigo digital print units	Fine	F150 DP	F200 DP F200 XE DP	-
	Velvet	V150 DP	V200 DP V200 XE DP	V280 DP
	Softouch		ST200 DP	

### PRIMER

**Autotex DP** has an ink adhesion primer on the second surface. This primer confers excellent ink adhesion with Hewlett Packard Indigo Digital printing presses (S2000, WS2000, WS4050, 5600 and WS6800).



## BACKING INKS

A white backing can be screen printed over the image. Recommended white UV screen printing inks are listed below. Processing guidelines can be obtained from the ink manufacturer.

Recommended white UV screen printing inks	
Nor-Cote NBW	Nazdar 3478
Nor-Cote PTX-1046	Nazdar 3498
Proell NoriCure® AP 944	Nazdar NSC44

## WINDOWS

The **Autotex DP** texture can be screen printed with Windotex windowing lacquers to obtain a clear window. Printing guidelines are available in the Windotex Processing and Safety Recommendations. Nor-Cote® MSK Lens Clear can be applied to the second surface to obtain additional clarity

## OUTDOOR USE

Also available, **Autotex XE DP** has been developed for applications where high or widely fluctuating temperatures, excessive humidity and strong levels of ultraviolet light are encountered.

## TYPICAL PROPERTIES

Property	Typical Value	Test Method
Haze <sup>1</sup> Fine Velvet Softouch	58% ±5% 71% ±5% 90% ±2%	ASTM D1003
Total luminous transmission <sup>1</sup>	92% ± 2%	ASTM D1003
Gloss level (60°) <sup>1</sup> Fine Velvet Softouch	7 ±1.5 Gloss Units 4.5 ±1 Gloss Units 1.5 ±0.2 Gloss Units	ASTM D2457 (modified to Test method 022)
Yellowness index <sup>3</sup>	< 3	ASTM E313
Switch life <sup>1</sup>	> 5 million actuations	Test method 003
Hardcoat adhesion <sup>3</sup>	Pass	Test method 080
UV absorption (370 nm) <sup>3</sup>	2.5-3.6	Test method 106
Tensile strength at break <sup>2</sup>	172-190 N/ mm <sup>2</sup>	ASTM D882
Breakdown voltage <sup>2,4</sup> 150 µm 200 µm 280 µm	16 – 18 kV 18 - 20 kV 22 kV	ASTM D149
Dimensional stability <sup>3</sup>	0.2% maximum shrinkage MD at 120 °C	Test method 094
Thickness all grades <sup>1</sup>	Nominal ± 10%	Test method 096
Max. processing temperature	120 °C	-
Maximum use temperature <sup>1</sup>	Low humidity (< 10% RH) 85 °C High humidity (10-95% RH) 60 °C	Test method 012
Minimum use temperature <sup>1</sup>	-40 °C (-40 °F)	Test method 012
Chemical Resistance	Excellent resistance to many common industrial solvents and household chemicals - please refer to <b>Autotex</b> and <b>Autotex XE</b> Solvent Resistance Data Sheets	

<sup>1</sup> For details of test method, please contact MacDermid Enthone Industrial Solutions

<sup>2</sup> Data derived from base film manufacturer's literature. The coating slightly enhances most properties

<sup>3</sup> Specification value

<sup>4</sup> Thick PET, including 250 µm films typically melt at high applied voltages

\* The term polyester is the generic term for a number of different polymers, of which polyethylene terephthalate (PET) is the most common. PET is used in MacDermid Enthone Industrial Solutions polyester film products

Note – performance characteristics may be subject to change

## SAFETY & WARNING

MacDermid Enthone Industrial Solutions recommends that the company/operator read and review the Safety Data Sheets for the appropriate health and safety warnings before use.

**Safety Data Sheets are available from MacDermid Enthone Industrial Solutions.**

## WASTE TREATMENT

Prior to using any recommendations or suggestions by MacDermid Enthone Industrial Solutions for waste treatment, the user is required to know the appropriate local/state/federal regulations for on-site or off-site treatment which may require permits. If there is any conflict regarding our recommendations, local/state/federal regulations take precedent.

## CONTACT INFORMATION

To confirm this is the most recent issue, please contact us:

[industrialfilms@macdermidenthone.com](mailto:industrialfilms@macdermidenthone.com)

<b>Americas</b> 245 Freight Street Waterbury, CT 06702, USA (800) 323 0632	<b>Europe &amp; rest of the world</b> Grove Road, Wantage, Oxon OX12 7BZ, UK +44 (0) 1235 771111	<b>Asia</b> 26 Tuas West Road Singapore 638382 +65 6862 3327
---	---	---

Website: [industrial.macdermidenthone.com](http://industrial.macdermidenthone.com)

The information and recommendations in this publication are believed to be accurate and are offered in good faith. Suggestions concerning uses and applications are only the opinion of MacDermid Autotype Limited and/or its affiliates and related entities (referred to herein as “MacDermid”) and users should carry out their own testing procedures to confirm suitability for their purposes. Except in case of death or personal injury caused by the materials, MacDermid MAKES NO WARRANTY OF ANY KIND AND EXCLUDES ANY STATUTORY WARRANTY EXPRESS OR IMPLIED other than that materials conform to their current applicable standard specifications. Statements herein therefore should not be construed as guarantees of satisfactory quality or fitness for purpose unless expressly prohibited by compulsory law provisions. The responsibility of MacDermid for claims arising out of breach of guarantee, negligence, strict liability or otherwise is limited to the purchase price of the material. Suggestions concerning working practices and procedures are based on the practices adopted by existing users of the products and are made in good faith. IT IS THE RESPONSIBILITY OF THE USER TO ENSURE THAT ALL RELEVANT HEALTH AND SAFETY LAWS AND REGULATIONS ARE COMPLIED WITH. MacDermid does not provide any advice on such laws and regulations and accepts no responsibility, express or implied, for breach of such regulations.

**WARNING:** Nothing in this guide or in these technical specifications should be construed to imply or suggest that the user employ operations or create articles, which would infringe any patents belonging to third parties. It is the customer’s responsibility to ensure that its operations, the conditions of processing, and articles of manufacture do not infringe the foregoing patents, or any third-party patents. MacDermid does not accept responsibility for any infringement of intellectual property rights of third parties.